



DAMATI PLASTICS

PLOT NO. 342 / 3 (93),, BHARAT INDUSTRIAL ESTATE
 DAMAN-396210
 INDIA

CONTACT PERSON : MR. SANAD UPADHYAY

THE FOLLOWING SAMPLE(S) WAS/WERE SUBMITTED AND IDENTIFIED BY/ON BEHALF OF THE CUSTOMER AS :

SAMPLE DESCRIPTION PLASTICS RECTANGULAR& ROUND CONTAINER WITH LID
COLOUR BLACK, WHITE & TRANSPARENT
STYLE NO. DP-500ML, DP-650ML, DP-750, DP-1000ML, DP-1500ML, RE-12, RE-16, RE-24, RE-28, RE-32, RE-38, RE-6240, C-500ML, C-650ML, DP-2OZ-HINGE, DP-4OZ-HINGE, DP-6OZ-HINGE, DP-8OZ,DP-100Z, DP-16OZ, DP-20OZ, DP-25OZ, DP-34OZ, DP-34OZ-L, DP-OZ-L, RO-16, RO-24, RO-32, RO-40, RO-48
SAMPLE RECD ON 09/11/2018
TEST PERFORMING DATE 09/11/2018 TO 24/11/2018

SUMMARY OF TEST RESULTS:

TEST REQUESTED	CONCLUSION
MICROWAVE SAFE TEST	PASS

TEST(S) RESULT & METHOD:PLEASE REFER TO NEXT PAGE(S)

Per Pro SGS India Pvt. Ltd.

SANDIP BHUSHAN(Asst. Manager)

Email your Test Report Related Enquiries at Feedback.HLT@sgs.com



TEST RESULTS :-


MICROWAVE SAFE TEST:-

Method: SGS-TM-HL-00123
Test Condition: Specified cycles used : 05
 Actual Test Microwave Power: 797.9 W
 Each Cycle Time: 05 Min.
 Substrate Used: Water
 Max. Surface Tem. After 1st cycle: 52°C (Mid. Point Of Container)

Tested Name	Test result	Requirement
Microwave Oven Test	No visually change observed after 5 cycle	No adverse effects when ½ fill with water and boil for 3 minutes for 5 cycles of domestic microwave cycles by IEC 1000W(Equivalent) microwave oven. The maximum surface temperature of Graspable area shall not exceed: Ceramic, glass-ceramic or glass: 56°C; Plastic, wooden: 60°C.
Conclusion	Pass	--

Tested Item: Plastics Rectangular Container Without Lid

Note : Testing has been performed as per client's request.

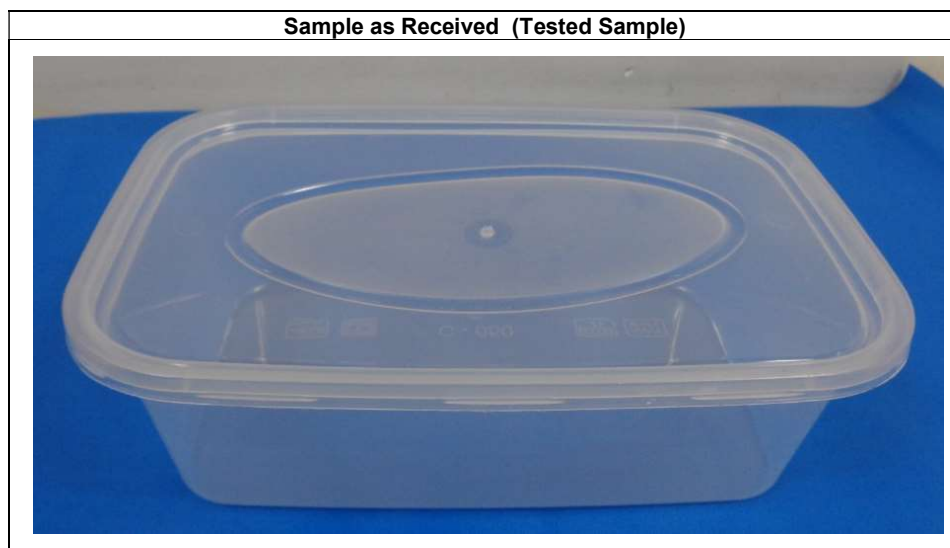



Sample as Received (Grouped Samples)



***** END OF REPORT*****